SUNCOURT®

ROOM TO ROOM
TRANSFER FANS



BALANCE TEMPERATURES IN ADJOINING ROOMS







IDEAL FOR USE IN HOTEL ROOMS, OFFICE SPACE, ASSISTED LIVING, AND HOMES WITH PTAC UNITS, MINI SPLIT SYSTEMS, WINDOW AIR CONDITIONERS, FIREPLACES, PELLET BURNERS AND MORE FOR YEAR ROUND COMFORT

ENGINEERED & ASSEMBLED IN USA

QUALITY

COMFORT

CONTROL

ENERGY EFFICIENT

12 MONTH LIMITED WARRANTY

ENGINEERED & ASSEMBLED IN USA




Want to learn more?

#TW108

CORDED 2 SPEED



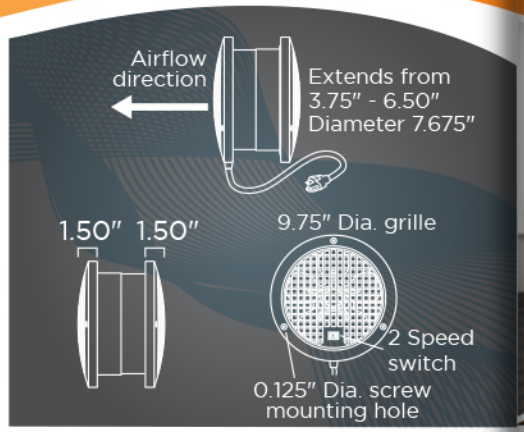

- 2-Speed motor
- Easy to install in any frame wall (3 ¾"-6 ½" thick)
- 10' attached power cord
- Fan airflow exhausts on the switch side. *For special build fan with airflow exhausting on non-switch side, please contact us for details.*

Model	Fan Speeds	Sq. Ft. of Room	CFM
TW108	2 Speeds	200 - 440 sq. ft.	155 - 192

ENERGY EFFICIENT

12 MONTH LIMITED WARRANTY

ENGINEERED & ASSEMBLED IN USA




Want to learn more?

#TW208

HARDWIRED VARIABLE SPEED



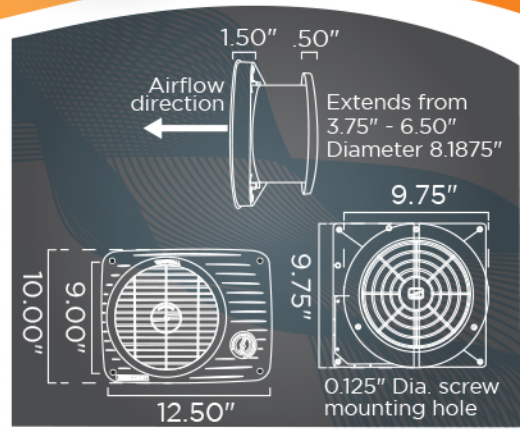

- Rotating grille that allows airflow direction to be changed or privacy from adjoining room.
- Variable Speed fan for customized airflow
- Easy to install in any frame wall (3 ¾"-6 ½" thick)
- Hardwired for clean installation
- Fan airflow exhausts on the switch side. *For special build fan with airflow exhausting on non-switch side, please contact us for details.*

Model	Fan Speeds	Sq. Ft. of Room	CFM
TW208	Variable Speed	Up to 200 sq. ft.	40 - 100

ENERGY EFFICIENT

12 MONTH LIMITED WARRANTY


ENGINEERED & ASSEMBLED IN USA



Want to learn more?

#TW408 CORDED 2 SPEED



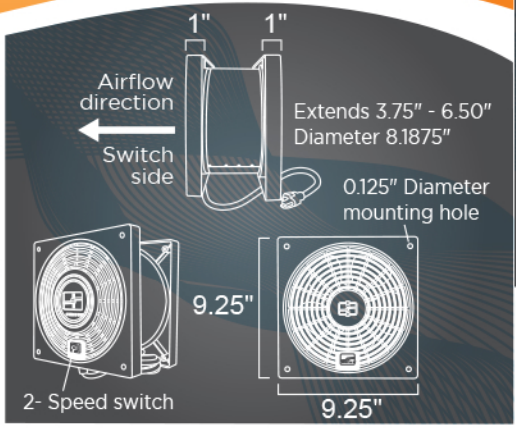

- 2 airflow adapter plates and 2-speed motor for better temperature control.
- Fan airflow exhausts on the switch side. *For special build fan with airflow exhausting on non-switch side, please contact us for details.*
- Easy to install in any frame wall (3 ¾"-6 ½" thick)
- 10' attached power cord

Model	Fan Speeds	Sq. Ft. of Room	CFM
TW408	2 Speeds	100 - 275 sq. ft	90 - 130